

RESIDENTIAL LIGHT COMMERCIAL

Making entering and exiting residential and commercial properties safe and easy, day and night, no matter what the weather conditions...that's what makes Apollo Gate Operators so valuable. We offer swing, dual swing and slide gate operators that are 12 volt DC powered and can be recharged with solar or AC power. All of our gate operators come with a two year warranty and are also available in models that meet UL 325 standards. With our advanced circuit board and a complete line of entry and exit accessories available, Apollo Gate Operators offer state-of-the-art performance for all types of applications.



1500

- Swing Gate Operator
- Push to open or pull to open application
- Easily adjustable limit switches
- Operates swing gates up to 16 ft. and 600 lbs.

1550ETL

- Swing Gate Operator
- Push to open or pull to open application
- Easily adjustable limit switches
- Soft start/soft stop feature
- Operates swing gates up to 16 ft. and 600 lbs.
- Meets UL 325 standard




1600

- Dual Swing Gate Operator
- Push to open or pull to open application
- Easily adjustable limit switches
- Operates swing gates up to 16 ft. and 600 lbs each

1650ETL

- Dual Swing Gate Operator
- Push to open or pull to open application
- Easily adjustable limit switches
- Soft start/soft stop feature
- Operates swing gates up to 16 ft. and 600 lbs each
- Meets UL 325 standard

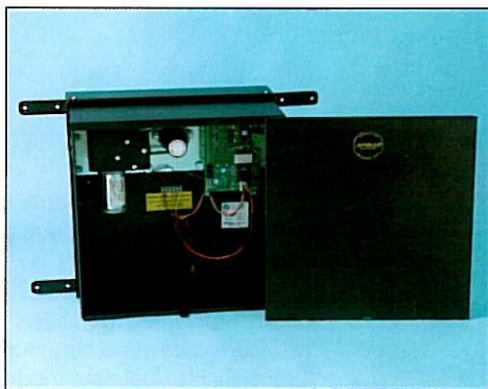


7000ETL

- Post-mounted Slide Gate Operator
- Fully systems capable
- Operates slide gates up to 20 ft. and 600 lbs.
- Includes 35 ft. of #40 roller chain
- Residential and light commercial applications
- Internal quick release
- Also available in a dual gate model
- Meets UL 325 standard

APOLLO™

BA12

GATE OPERATORS

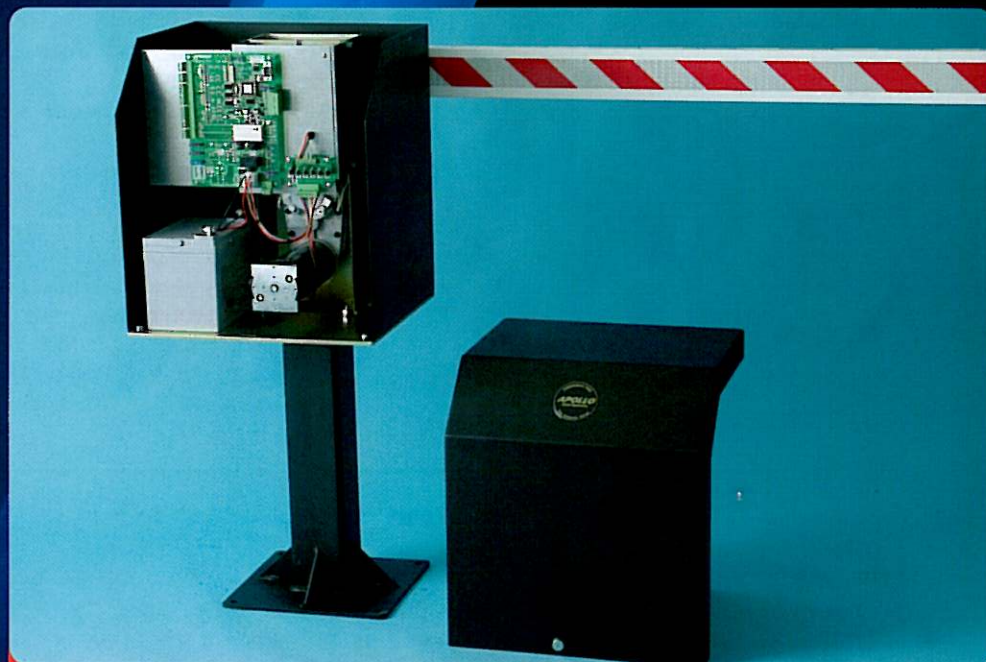

MODEL BA12

Barrier Arm Operator

THE APOLLO BA12 BARRIER ARM OPERATOR IS DESIGNED TO HANDLE A BARRIER ARM UP TO 16 FEET IN TOTAL LENGTH. APOLLO OPERATORS ARE AVAILABLE ONLY THROUGH QUALIFIED DEALERS WITH AN OUTSTANDING REPUTATION IN THE FENCE AND GATE INDUSTRY. THESE DEALERS WILL BE ABLE TO RECOMMEND THE PROPER EQUIPMENT FOR PARTICULAR APPLICATIONS. APOLLO OPERATORS ARE 12 VOLT DC (*DIRECT CURRENT*) POWERED. A 12 VOLT SEALED BATTERY (33 AMPERE HOUR MINIMUM) IS RECOMMENDED.

APOLLO™

1500/1550ETL

GATE OPERATORS

MEMBER OF NICE GROUP



MODEL 1500/1550ETL Swing Gate Operator

APOLLO OFFERS ITS SINGLE ACTUATOR SWING GATE OPERATOR IN TWO MODELS, THE 1500 AND THE 1550ETL. BOTH MODELS ARE EASILY INSTALLED ON MOST EXISTING OR NEW SWING GATES OF UP TO 16 FEET IN LENGTH AND 600 POUNDS. THE 1550ETL MODEL UTILIZES OUR ADVANCED CIRCUIT BOARD, WHICH OFFERS THE POPULAR SOFT START/SOFT STOP FEATURE, AS WELL AS ADDITIONAL INPUTS FOR A FIREBOX, MONITOR LIGHTS, A LOCK, SIREN AND STROBE LIGHTS. UNLIKE OTHER OPERATORS ON THE MARKET, THE 1550ETL MODEL ACTUALLY LEARNS AND STORES IN MEMORY BOTH THE CURRENT LIMIT SETTINGS AND THE LENGTH OF THE ACTUATOR STROKE, CREATING A DEFAULT SETTING FOR FUTURE CYCLES - ALLOWING FOR LONGER OPERATOR LIFE AND GREATER SAFETY.

APOLLO™

1600/1650ETL

GATE OPERATORS




MODEL 1600/1650ETL Swing Gate Operator

APOLLO OFFERS ITS DUAL ACTUATOR SWING GATE OPERATOR IN TWO MODELS, THE 1600 AND THE 1650ETL. BOTH MODELS ARE EASILY INSTALLED ON MOST EXISTING OR NEW SWING GATES OF UP TO 16 FEET IN LENGTH AND 600 POUNDS EACH. THE 1650ETL MODEL UTILIZES OUR ADVANCED CIRCUIT BOARD, WHICH OFFERS THE POPULAR SOFT START/SOFT STOP FEATURE, AS WELL AS ADDITIONAL INPUTS FOR A FIREBOX, MONITOR LIGHTS, A LOCK, SIREN AND STROBE LIGHTS. UNLIKE OTHER OPERATORS ON THE MARKET, THE 1650ETL MODEL ACTUALLY LEARNS AND STORES IN MEMORY BOTH THE CURRENT LIMIT SETTINGS AND THE LENGTH OF THE ACTUATOR STROKE, CREATING A DEFAULT SETTING FOR FUTURE CYCLES - ALLOWING FOR LONGER OPERATOR LIFE AND GREATER SAFETY.

APOLLO™

3500ETL/3600ETL DUAL

GATE OPERATORS

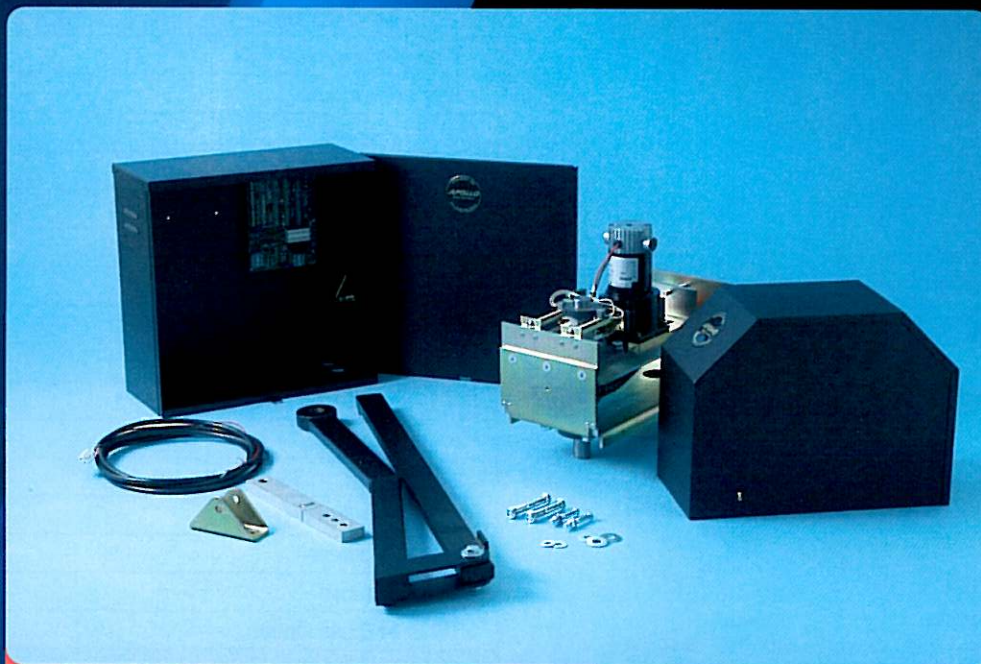


3500ETL/3600ETL DUAL Swing Gate Operator

APOLLO OFFERS ITS ARTICULATING ARM SWING GATE OPERATORS IN TWO MODELS, THE 3500ETL AND 3600ETL (DUAL). BOTH MODELS ARE EASILY INSTALLED ON MOST EXISTING OR NEW SWING GATE. BOTH OPERATORS HAVE A NEW ARM DESIGN THAT ELIMINATES MAJOR PINCH POINTS. THIS OPERATOR IS PERFECT FOR HEAVY DUTY COMMERCIAL OR RESIDENTIAL CONTINUOUS OPERATION. THIS OPERATOR HAS A LOW PROFILE AND IS POST MOUNTED. THE 3500ETL WILL OPERATE GATES UP TO 20 FEET LONG AND 1000 POUNDS. THE 3500ETL AND 3600ETL (DUAL) UTILIZES OUR ADVANCED CIRCUIT BOARD 835/836. THE 835 SINGLE/836 DUAL CIRCUIT BOARDS OFFER ADDITIONAL INPUTS FOR A FIREBOX, OUTPUT MONITOR LIGHTS, A LOCK, SIREN AND STROBE LIGHTS. THE 3500ETL/3600ETL DUAL HAS ADJUSTABLE LIMITS AND AN ADJUSTABLE ARM. THIS 3500ETL/3600ETL DUAL IS THE BEST UNIT FOR ALL SWING GATE APPLICATIONS AND ARE TRUE LOW VOLTAGE 12 VOLTS DC BATTERY POWERED.

APOLLO™

7000ETL

GATE OPERATORS

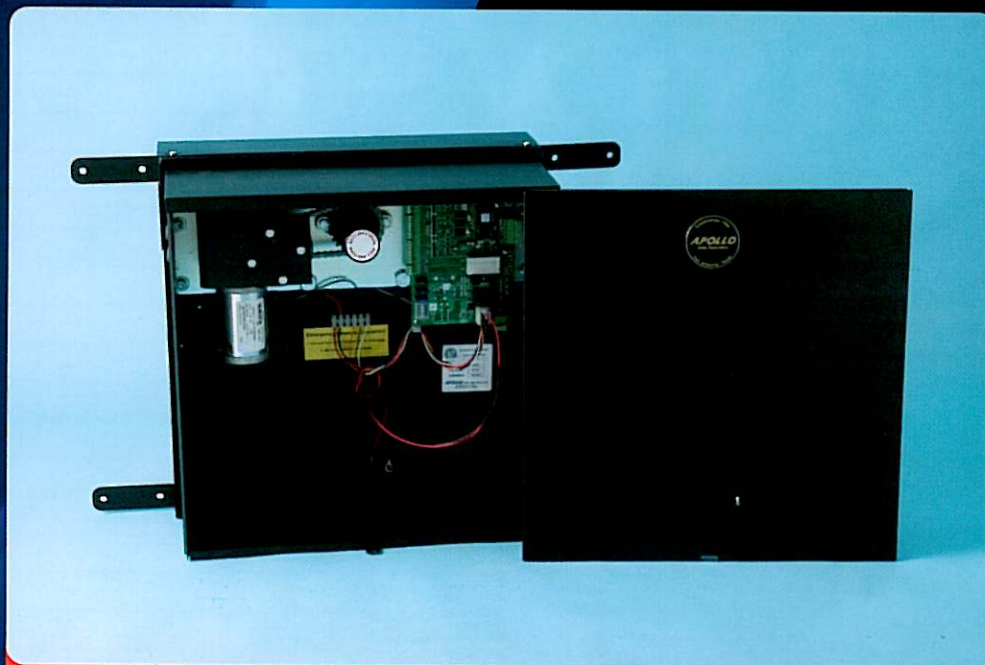

MODEL 7000ETL Slide Gate Operator

APOLLO OFFERS ITS RESIDENTIAL LIGHT COMMERCIAL POST-MOUNTED SLIDE GATE OPERATOR IN TWO MODELS, THE 7000ETL AND THE 7000ETL DUAL. BOTH MODELS ARE EASILY INSTALLED ON MOST EXISTING OR NEW SLIDE GATES OF UP TO 20 FEET IN LENGTH AND 600 POUNDS. THE 7000ETL MODEL UTILIZES OUR ADVANCED CIRCUIT BOARD, THE 835, WHICH OFFERS ADDITIONAL INPUTS FOR A FIREBOX, OPEN/CLOSE LIMIT SWITCH LEDS, MONITOR LIGHTS, A LOCK, SIREN AND STROBE LIGHTS. THE 835 HAS INHERENT SAFETY FEATURES THAT COMPLY WITH THE UL325 STANDARDS. BATTERY SOLD SEPARATELY.

APOLLOTM

7100ETL

GATE OPERATORS



MODEL 7100ETL Slide Gate Operator

APOLLO OFFERS ITS RESIDENTIAL LIGHT COMMERCIAL PAD-MOUNTED SLIDE GATE OPERATOR IN TWO MODELS, THE 7100ETL AND 7100ETL DUAL. BOTH MODELS ARE EASILY INSTALLED ON MOST EXISTING OR NEW SLIDE GATES OF UP TO 20 FEET IN LENGTH AND 600 POUNDS. THE 7100ETL MODEL UTILIZES OUR ADVANCED CIRCUIT BOARD, THE 835 SINGLE/836 DUAL, WHICH OFFERS ADDITIONAL INPUTS FOR A FIREBOX, OPEN/CLOSE LIMIT SWITCH LEDS, MONITOR LIGHTS, A LOCK, SIREN AND STROBE LIGHTS. THE 835/836 HAS INHERENT SAFETY FEATURES THAT COMPLY WITH THE UL325 STANDARDS.

APOLLO™

7200ETL

GATE OPERATORS



MODEL 7200ETL Slide Gate Operator

APOLLO OFFERS ITS HEAVY DUTY COMMERCIAL POST-MOUNTED SLIDE GATE OPERATOR IN TWO MODELS, THE 7200ETL AND 7200ETL DUAL. BOTH MODELS ARE EASILY INSTALLED ON MOST EXISTING OR NEW SLIDE GATES OF UP TO 30 FEET IN LENGTH AND 1000 POUNDS AND ARE APPROPRIATE FOR CONTINUOUS DUTY WORK. THE 7200ETL AND 7200ETL DUAL UTILIZES OUR ADVANCED CIRCUIT BOARD, THE 835 SINGLE/836 DUAL, WHICH OFFERS ADDITIONAL INPUTS FOR A FIREBOX, OPEN/CLOSE LIMIT SWITCH LEDS, MONITOR LIGHTS, A LOCK, SIREN AND STROBE LIGHTS. THE 835/836 HAS INHERENT SAFETY FEATURES THAT COMPLY WITH THE UL325 STANDARDS. BATTERY SOLD SEPARATELY.

APOLLO™

7300ETL

GATE OPERATORS




MODEL 7300ETL Slide Gate Operator

APOLLO OFFERS ITS HEAVY DUTY COMMERCIAL PAD-MOUNTED SLIDE GATE OPERATOR IN TWO MODELS, THE 7300ETL AND 7300ETL DUAL. BOTH MODELS ARE EASILY INSTALLED ON MOST EXISTING OR NEW SLIDE GATES OF UP TO 30 FEET IN LENGTH AND 1000 POUNDS. THE 7300ETL MODEL UTILIZES OUR ADVANCED CIRCUIT BOARD, THE 835 SINGLE/836 DUAL, WHICH OFFERS ADDITIONAL INPUTS FOR A FIREBOX, OPEN/CLOSE LIMIT SWITCH LED'S, MONITOR LIGHTS, A LOCK, SIREN AND STROBE LIGHTS. THE 7300ETL IS A HEAVY DUTY RESIDENTIAL OR COMMERCIAL SLIDE GATE OPTION, APPROPRIATE FOR CONTINUOUS DUTY WORK. THE 7300ETL EQUIPPED WITH 835/836 CIRCUIT BOARDS HAS INHERENT SAFETY FEATURES THAT COMPLY WITH THE UL325 STANDARD.

APOLLO™

7500ETL

GATE OPERATORS

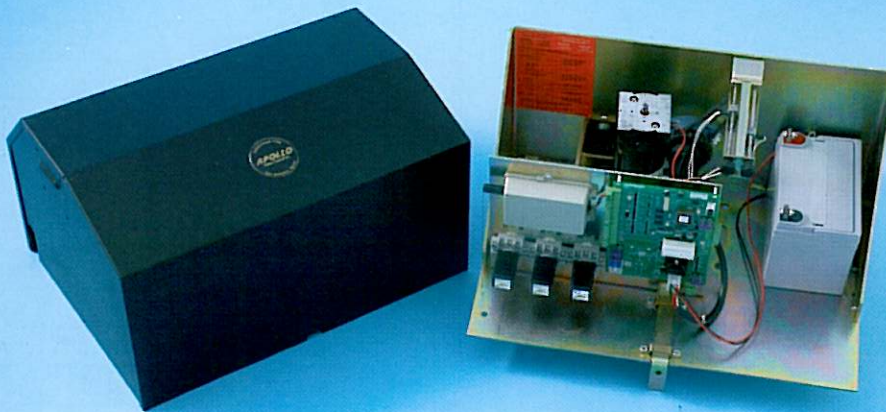

BATTERY & ACCESSORIES NOT INCLUDED

MODEL 7500ETL Slide Gate Operator

APOLLO OFFERS ITS SLIDE GATE OPERATOR FOR HEAVY DUTY RESIDENTIAL OR COMMERCIAL SLIDE GATE APPLICATION. 7500ETL IS A CONTINUOUS DUTY OPERATOR WITH INTERNAL LIMITS. THE 7500ETL IS A POST MOUNT LOW PROFILE OPERATOR. THE 7500ETL MODEL UTILIZES OUR ADVANCED CIRCUIT BOARD, THE 835 SINGLE/836 DUAL, WHICH FEATURES ADDITIONAL INPUTS FOR A FIREBOX, MONITOR LIGHTS, A LOCK, SIREN AND STROBE LIGHTS. THE 7500ETL WILL OPERATE SLIDE GATES UP TO 30 FEET IN LENGTH AND 1000 POUNDS. THE 7500ETL HAS AN EXTERNAL QUICK RELEASE THAT ALLOWS FOR MANUAL OPERATION. THE 835/836 CIRCUIT BOARDS HAVE INHERENT SAFETY FEATURES THAT COMPLY WITH THE UL325 STANDARDS.

APOLLO™

SIGNO 6

GATE OPERATORS

MEMBER OF NICE GROUP



Nice

Nice

Nice

SIGNO 6

Barrier Arm

APOLLO OFFERS ITS 110 VAC BARRIER ARM OPERATOR (24V DC MOTOR) WITH AVAILABLE BATTERY BACK-UP THAT CAN BE USED FOR COMMERCIAL CONTINUOUS DUTY OPERATION. IT IS IDEAL FOR PRIVATE, PUBLIC AND INDUSTRIAL APPLICATIONS. WITH A SLEEK LOOK AND INNOVATIVE BREAK-AWAY ARM DESIGN THE SIGNO WILL HANDLE ALL YOUR BARRIER ARM NEEDS.

THE SIGNO USES THE NICE USER-FRIENDLY CONTROL UNIT THAT UPGRADES THE BARRIER TO A NUMBER OF INNOVATING FEATURES.

THE RECOMMEND ARM LENGTHS ARE UP TO 20FT.

APOLLO™

SIGNO 4

GATE OPERATORS

MEMBER OF NICE GROUP



Nice

Nice

Nice

SIGNO 4

Barrier Arm

APOLLO OFFERS ITS 110 VAC BARRIER ARM OPERATOR (24V DC MOTOR) WITH AVAILABLE BATTERY BACK-UP THAT CAN BE USED FOR COMMERCIAL CONTINUOUS DUTY OPERATION. IT IS IDEAL FOR PRIVATE, PUBLIC AND INDUSTRIAL APPLICATIONS. WITH A SLEEK LOOK AND INNOVATIVE BREAK-AWAY ARM DESIGN THE SIGNO WILL HANDLE ALL YOUR BARRIER ARM NEEDS.

THE SIGNO USES THE NICE USER-FRIENDLY CONTROL UNIT THAT UPGRADES THE BARRIER TO A NUMBER OF INNOVATING FEATURES.

THE RECOMMEND ARM LENGTHS ARE UP TO 12FT

950/951 KEYPAD

Mi Model No. 950^{WIRED}/951^{WIRELESS}

Unlimited features, an affordable price

Features abound in the Model 950/951 Metal Key Keypad. With over 12 user-programmable options, your applications are practically limitless.

The durable Model 950/951 is suited to both indoor and outdoor applications thanks to its rugged, injection-molded lexan faceplate and housing. With zinc-coated hardware, the 950/951 handles the toughest climates with ease.

When it comes to application flexibility, the 950/951 shines above the rest.

With the ability to operate in either AC or DC applications, our ultra-low 20uA current draw is roughly half that of our competitors.

It has 1000 user-programmable codes and can operate in wireless applications without the need for an exterior antenna. The 950/951 is flexible enough to adapt to either wall or gooseneck mounting situations.

Simply put, the Model 950/951 Metal Key Keypad is the best performing, most flexible, highest quality keypad available today. Proudly manufactured in the U.S.A.

Mechanical Specifications

7.5 in. (H) x 4.75 in. (W) x 4.5 in. (D)
190.50 mm (H) x 120.65 mm (W) x 114.30 mm (D)
UV-Resistant Lexan 403R Housing/Faceplate
Indoor/Outdoor suitable
Wall/Gooseneck mountable
Zinc coated hardware
Ship weight 3 lbs.

Electrical Specifications

7-24 VAC or VDC
20uA current draw

Environmental Specifications

Operating temperatures: -40°C to 85°C (-40°F to 185°F)
Storage temperatures: -55°C to 125°C (-67°F to 257°F)



toll-free 866.490.0216
fax 210.404.9869

12919 Agency
San Antonio, TX 78247-3476